



D4

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38</b>		A1	(11) International Publication Number: <b>WO 98/49858</b>
			(43) International Publication Date: 5 November 1998 (05.11.98)
(21) International Application Number: <b>PCT/US98/08368</b>		Noam, A.; 10968 Corte Playa Barcelona, San Diego, CA 92124 (US).  (74) Agent: OGROD, Gregory, D.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).  (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 29 April 1998 (29.04.98)			
(30) Priority Data: 08/845,944 29 April 1997 (29.04.97) US			
(71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, CA 92121 (US).			
(72) Inventors: BENDER, Paul, E.; 2879 Angell Avenue, San Diego, CA 92122 (US). ZIV, Toni, L.; 10968 Corte Playa Barcelona, San Diego, CA 92124 (US). KARMI, Gadi; 10968 Corte Playa Barcelona, San Diego, CA 92124 (US). LEE, Kuo-Chun; 17161 Alva Road #2013, San Diego, CA 92127 (US). LUEDER, Suzanne, M.; 828 Wilbur Drive, San Diego, CA 92109 (US). MOHANTY, Bibhu, P.; 4028 Mahaila Avenue #C, San Diego, CA 92122 (US). OTTINGER, Robert, C.; 820 Encinitas Boulevard #205, Encinitas, CA 92024 (US). QUICK, Roy, F.; 4502 Del Monte Avenue, San Diego, CA 92107 (US). STACHWICK, Steven, P.; 25226 Poderio Drive, Ramona, CA 92065 (US). SUTTON, Todd; 11275 Caminito Rodar, San Diego, CA 92126 (US). TANGIRALA, Venkat; Apartment 175, 12710 Torrey Bluff Drive, San Diego, CA 92130 (US). ZIV,			

## Published


With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: A CELLULAR TELEPHONE SYSTEM AND A METHOD OF CONDUCTING AN INTER-SYSTEM SOFT HANDOFF

## (57) Abstract

A method and apparatus for operating a cellular telephone system that supports performing an inter-system soft handoff is described. A subscriber unit (20) generates a pilot strength measurement report when the pilot channel from a base station (22A...22D) is detected. When a base station controller (24A, 24B) receiving the pilot strength measurement report determines that the base station (24A, 24B) is part of a second cellular telephone system, an inter-system soft handoff request is generated. An admission control subsystem (44) receives the inter-system soft handoff and either grants or denies the request based on the traffic level with the second cellular telephone system. The traffic level may be determined based on link load messages received periodically by the admission control subsystem (44) that are generated by an interface port (32f) coupled to an interconnect (46) between the first cellular telephone system and the second cellular telephone system. The link load message includes peak queue length and average frame rate information.

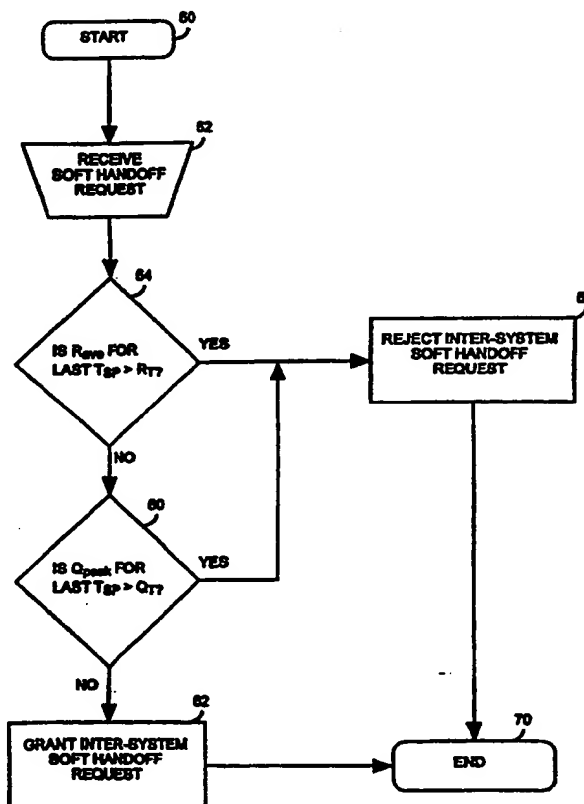

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# A CELLULAR TELEPHONE SYSTEM AND A METHOD OF CONDUCTING AN INTER-SYSTEM SOFT HANDOFF

## BACKGROUND OF THE INVENTION

### I. Field of the Invention

The present invention relates to a cellular telephone system and a method of conducting an inter-system soft handoff. More specifically, the present invention relates to a novel and improved method and apparatus for conducting telephone calls or other communications between wireless telecommunications systems that supports inter-system soft handoff.

### II. Description of the Related Art

FIG. 1 is a diagram of a cellular telephone system configured in accordance with the use of the IS-95 over-the-air interface standard. The IS-95 CDMA over the air interface standard (IS-95) promulgated by the Telecommunications Industry Association (TIA) defines a protocol for providing wireless telephone service via code division multiple access (CDMA) modulated RF signals. IS-95 has many derivatives and related standards including IS-95-A, ANSI J-STD-008, IS-99 and IS-657, referred to herein collectively as "IS-95." A cellular telephone system configured substantially in accordance with the use of IS-95 is described in US patent 5,103,459 entitled "System and Method for Generating Signal Waveforms in a CDMA Cellular Telephone System" assigned to the assignee of the present invention and incorporated herein by reference.

During operation, subscriber units 10 (typically cellular telephones) conduct communications by interfacing with base stations 12 using CDMA modulated RF signals. From base stations 12 the communications are further conducted using base stations controllers (BSC's) 14 and mobile switching centers (MSC's) 16 with public switched telephone network (PSTN) or other subscriber units 10. BSC's 14 provide call mobility functionality, as described in greater detail below, and MSC's 16 provides call routing, billing and switch interface functionality. Additionally, the data exchanged between the various systems shown in FIG. 1, including subscriber units 10 and base stations 12, are processed in frames. This data can be either traffic data which includes voice information, or signaling which is used to configure and control the various systems shown.

The use of CDMA technology allows adjacent base stations in an IS-95 system to conduct communications over the same RF bandwidth, which

increases the frequency reuse factor of the cellular telephone system when compared to other types of cellular telephone technology. When combined with extensive transmit power control, increasing the frequency reuse factor increases the efficiency with which the cellular telephone system uses the available RF bandwidth, which is one of the advantages of the IS-95 standard.

Another advantage of allowing the same RF bandwidth to be used by adjacent base stations 12 is that "soft handoff" can be used to transition a subscriber unit 10 from the coverage area of a first base station 12 to the coverage area of a second base station 12. Soft handoff involves simultaneously interfacing a subscriber unit 10 with two or more base stations as the subscriber unit transitions between the associated coverage areas of the two base stations 12. One of the subscriber units 10 shown in FIG. 1 is in soft handoff.

Soft handoff can be contrasted with hard handoff, where the interface with the first base station 12 is terminated before the link with the second base station has been established. Maintaining at least one link at all times improves the reliability and quality of the communication being conducted. A system and method for performing soft handoff is described in US described in US Patents 5,101,501 entitled "Method and System for Providing a Soft Handoff in Communications in a CDMA Cellular Telephone System" and US Patent No. 5,267,261 entitled "Mobile Station Assisted Soft Handoff in a CDMA Cellular Communications System" both assigned to the assignee of the present invention and incorporated herein by reference.

As noted above, BSC's 14 perform various functions that allow mobile communications to be conducted including functions that facilitate soft handoff. In particular, BSC's 14 perform "frame selection" and "frame distribution" for the set of base stations 12 involved in the soft handoff call. Frame selection is the selection of one frame for further processing from the set of frames received from the set of base stations used during a soft handoff. Frame selection maintains the highest quality link by selecting the best frame available at all times.

Frame distribution is the duplication and distribution of frames directed to the subscriber unit 10 to the set of base stations 12 involved in the call. Frame distribution allows each base station 12 to transmit a copy of the frame to the subscriber unit 10 increasing the probability of successful reception of at least one frame.

As shown in FIG. 1, subscriber unit 10A is interfacing with a single base stations 12A and is located near the coverage area of a second base station 12B. Base stations 12A and 12B, however, are coupled to different BSC's 14. This complicates the process of performing soft handoff because  
5 neither BSC 14 has access to both base stations 12A and 12B. Performing soft handoff between two base stations 12 that are controlled by two different BSC's 14 is referred to as "inter-system soft handoff." Inter-system soft handoff can be contrasted with "intra-system soft handoff" in which a soft handoff is conducted between two base stations 12 controlled by the same  
10 BSC.

For inter-system soft handoff, frame selection cannot be performed as easily because neither BSC 14 has access to the set of frames that are produced by the two base stations 12. Additionally, frame distribution is also rendered more difficult because neither BSC can transmit the set of frames  
15 generated to both base stations. Nonetheless, it is necessary to use two or more BSC's 14 in many large metropolitan areas because the number of base stations required to provide adequate coverage exceeds the capabilities of a single cellular system formed using a single BSC 14, which in turn creates the need to conduct inter-system soft handoff.

A system and method for performing an inter-system soft handoff is described in copending US patent application serial no. 08/649,959 entitled "Inter-system Calling Supporting Inter-System Soft Handoff" assigned to the assignee of the present invention and incorporated herein by reference. In this application, a channel between the two BSC's 14 is established via an  
20 interconnect for exchanging the data necessary to perform soft handoff. Additionally, each BSC is required to either store or obtain information typically tracked within an MSC, and therefore must interact with an MSC in order to perform the soft handoff. Preferably, the interconnect is comprised of a standard T-1 or E-1 link, which are well known and therefore  
25 relatively inexpensive to implement. To establish the channel, signaling messages are exchanged between the two BSC's 14 involved in the call. As noted above, the information contained in the signaling messages require each BSC 14 to track certain information including the number of calls being conducted over the interconnect, or interact with an MSC tracking that  
30 information, and to provide the other BSC 14 with certain predefined types of information. The number of calls on the interconnect are tracked to avoid overloading the interconnect.  
35

Requiring BSC's 14 to obtain, track or provide certain types of information, however, is highly restrictive, and can be difficult for some manufacturers of BSC's to implement. Additionally, it requires a significant degree of coordination and cooperation between BSC and MSC manufactures, which is not always feasible. Thus, a system and method of performing inter-system soft handoff that requires less cooperation and coordination between BSC's 14 and MSC's 16 would be highly desirable.

## SUMMARY OF THE INVENTION

10

An object of the present invention is to provide a novel and improved method and apparatus for operating a cellular telephone system that supports performing an inter-system soft handoff.

In one aspect the invention provides a method for conducting an inter-system soft handoff of a call made by a subscriber unit between a first cellular system and a second cellular system, the method comprising a) monitoring a traffic level exchanged between the first cellular system and the second cellular system; and b) granting a soft handoff request based on said traffic level.

In another aspect the invention provides A cellular telephone system capable of conducting an inter-system soft handoff with a second cellular telephone system, the cellular telephone system comprising: a cellular system interface port for monitoring a traffic level exchanged with the second cellular telephone system; a selector for initiating an inter system soft handoff; and an admission control subsystem for admitting said inter-system soft handoff and rejecting said inter-system soft handoff based on said traffic level.

In a further aspect the invention provides a controller for controlling hand off between two cellular telephone systems, the controller comprising means for monitoring data flow between the two systems and determining therefrom whether or not to allow hand off between the two systems.

In an embodiment of the invention a subscriber unit generates a pilot strength measurement report when the pilot channel from a base station is detected. When a base station controller receiving the pilot strength measurement report determines that the base station is part of a second cellular telephone system, an inter-system soft handoff request is generated. An admission control subsystem receives the inter-system soft handoff

request and either grants or denies the request based on the traffic level on the interconnect with the second cellular telephone system. For example, if the traffic level is too high, the inter-system soft handoff request is rejected. In a preferred embodiment of the invention, the traffic level is determined  
5 based on link load messages received periodically by the admission control subsystem that are generated by an interface port coupled to an interconnect between the first cellular telephone system and the second cellular telephone system. The link load message include peak queue length and average frame rate information.

10

## BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below of an embodiment of the invention when taken in conjunction with the  
15 drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a block diagram of a set of cellular systems configured in accordance with the prior art;

20 FIG. 2 is block diagram of a set of cellular telephone systems configured in accordance with one embodiment of the invention;

FIG. 3 is a flow chart illustrating the steps performed in granting or declining an inter-system soft handoff request when performed in accordance with one embodiment of the invention.

25

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

30 A method and apparatus for operating a cellular telephone system that supports inter-system soft handoff is described. In the following description, the invention is set forth in the context of a radio frequency signal interface operating in accordance with physical signal modulation techniques of the IS-95 over-the-air protocol including the use of CDMA  
35 signal modulation. While the described embodiment of the invention is especially suited for use with such signal modulation techniques, the use of other wireless telecommunications protocols is consistent with the practice of the present invention including protocols that utilize CDMA signal

processing techniques, or protocols that are capable of providing soft handoff functionality. Furthermore, it should be understood that the present invention is intended for use with various types of communications, including both voice based communications as well as communications during which digital data representing information other than voice is transmitted.

Throughout this specification, the use and transmission of various types of information is described including data and signaling messages. It should be understood that this information is constituted by electronic representations of this data and signaling messages that are generated via the use of electric currents, voltage potentials, electromagnetic energy, or a combination thereof. Additionally, the following description contains reference to various systems for responding to, as well as manipulating and generating of, such information. In the preferred embodiment of the invention, such systems are implemented via the use of digital and analog integrated semiconductor circuits coupled to one another via various conductive connections or via the use of electromagnetic signals, or both. Also, the invention may be incorporated into satellite based wireless telecommunications systems. In other instances throughout the application, various well known systems are described in block form. This is done to avoid unnecessarily obscuring the disclosure of the present invention.

FIG. 2 is a block diagram of a portion of a set of cellular telephone systems configured in accordance with one embodiment of the invention. Base station controllers (BSC's) 24A and 24B are coupled to base stations 22 and to mobile switching center (MSC) 16 of FIG. 1 (MSC is not shown in FIG. 2). Subscriber unit 20 interfaces with base station 22A via RF signals modulated in accordance with the IS-95 standard, and therefore using CDMA modulation techniques. Subscriber unit 20 is shown a similar distance from base stations 22A and 22B, and therefore entering the coverage area of base stations 22B. As shown in FIG. 1, base station 22A is coupled to BSC 24A and base station 22B is coupled to BSC 24B.

BSC 24A is shown in additional detail to illustrate a preferred configuration in accordance with one embodiment of the invention. -CDMA interconnect subsystem (CIS) 30 is coupled to base stations 22A and 22D, selector subsystem 40, call control processor (CCP) 42, admission control subsystem 44, and interconnect 46 via base station communication network



(BCN) ports 32a - 32f. BCN ports 32a provides frame buffering by queuing both inbound and outbound frames. Selector 40 is coupled to MSC 16 of FIG. 1, and interconnect 46 is coupled to BSC 24B. Interconnect 46 is typically a T1 or E1 connection, the use of which is well known in the art.

5 During operation, the various systems that make up BSC 24A, as well as base stations 22A and 22D, exchange signaling and information using network packets that are routed by CIS 30. Each network packet contains the address of the subsystem to which it is directed. Selector subsystem 42 performs the frame selection and frame distribution functions for soft  
10 handoff as described above. CCP 42 allocates and deallocates resources for processing the call including signal processing resources within base stations 22 and selector resources within selector subsystem 40.

As described in the above referenced 5,267,261 patent entitled "Mobile Station Assisted Soft Handoff in a CDMA Cellular Communications  
15 System" subscriber unit 20 repeatedly searches for pilot channels generated by base stations 22, and if a pilot channel is detected at a sufficient strength and for a sufficient duration, a pilot strength measurement report (PSMR) is generated by subscriber unit 20 and transmitted to selector subsystem 40 via base station 22A and CIS 30. The PSMR indicates the set of pilot channels  
20 currently detected by the subscriber unit 20 and associated signal strengths and pilot phases.

Upon receipt of the PSMR, the selector will determine that the pilot channel from base station 22B is being detected by subscriber unit 20. Using a pilot database (PDB) located within selector subsystem 40 (not shown) the  
25 selector subsystem 40 determines that the pilot channel is from a base station coupled to BSC 24B, rather than from a base station coupled to BSC 24A, and therefore not directly accessible by selector subsystem 40. In response to this determination, the selector subsystem transmits an inter-system soft handoff request to admission control subsystem 44 specifying the BSC 24 with which  
30 the inter-system soft handoff is to be conducted.

In addition to inter-system soft handoff requests, admission control subsystem 44 also receives traffic report messages from BCN port 32f, as well as any other BCN ports 32 coupled to other BSC's 24. (Typically, BSC 24A will be coupled to several other BSC's 24, although only one is shown in  
35 FIG. 2 to facilitate understanding of the invention.) Using the traffic reports, admission control subsystem 44 either accepts or rejects the inter-system soft handoff request and indicates such to selector subsystem 40 via a signaling

message. If the inter-system soft handoff request is rejected, the transfer of subscriber unit 20 to the coverage area of base station 22B may be performed using a hard handoff via the MSC.

If the inter-system soft handoff request is accepted, selector subsystem 40 transmits an inter-system soft handoff initiation message to BSC 24B, and begins to copy and transmit forward link frames directed to subscriber unit 20 to BSC 24B via interconnect 46. BSC 24B responds by instructing base station 22B to allocate signal processing resource for conducting the call, and by forwarding the forward link frames received to base station 22B which transmits the frames to subscriber unit 20 via CDMA modulated RF signals. Additionally, BSC 24B forwards reverse link frames received by base station 22B from subscriber unit 20 to BSC 24A where they are routed to selector subsystem 40 for frame selection. At this time, a steady state inter-system soft handoff has been established with a minimum of signal exchange and processing by BSC 24B. Thus, the ability of an inter-system soft handoff to be established by BSC 24A with a minimum amount of coordination and cooperation has been provided.

To allow admission control subsystem 44 to properly monitor the traffic transmitted through BCN port 32f, BCN port 32f transmits link load messages to admission control subsystem 44. In the preferred embodiment of the invention the link load messages are transmitted periodically at a period  $T_{\text{SampleLoad}}$ , and indicate  $R_{\text{ave}}$ , the average frame reception rate of BCN port, and  $Q_{\text{peak}}$ , the peak transmission queue length, in bytes, of BCN port 32f over the last period  $T_{\text{SampleLoad}}$ . In the preferred embodiment of the invention,  $R_{\text{ave}}$  is the total number of good frames received by BCN port 32f from BSC 24B during the previous period  $T_{\text{SampleLoad}}$  divided by the duration of the period  $T_{\text{SampleLoad}}$ . Additionally,  $Q_{\text{peak}}$  is the peak queue length, in bytes, of BCN part 32f over the last period  $T_{\text{SampleLoad}}$ .

In an alternative embodiment of the invention, BCN port 32f transmits the link load messages to admission control subsystem 44 only when a change in the load conditions occurs of more than a predetermined threshold, rather than every period  $T_{\text{SampleLoad}}$ . This reduces the number of signaling message transmitted, and therefore increases the call processing capacity of BSC 24A.

FIG. 3 is a flow chart illustrating the step performed by admission control subsystem 44 to determine whether to admit or reject an inter-system soft handoff request. The processing begins at step 50 and at step 52

the inter-system soft handoff request is received. At step 54 it is determined whether the average frame reception rate  $R_{ave}$  is greater than a frame reception rate threshold  $R_T$ , and if so the inter-system soft handoff request is rejected at step 56 and the procedure terminates at step 70.

5 If it is determined that the average frame reception rate  $R_{ave}$  is not greater than a frame reception rate threshold  $R_T$ , then it is determined at step 60 whether the peak transmission queue length  $Q_{peak}$  is greater than a queue length threshold  $Q_T$ , and if so the inter-system soft handoff request is rejected at step 56 and the procedure terminates at step 70.

10 If it is determined that the peak queue length  $Q_{peak}$  is not greater than a peak queue length threshold  $Q_T$ , the inter-system soft handoff is granted at step 62 and the procedure terminates at step 70.

In accordance with a preferred embodiment of the invention, the thresholds  $Q_T$  and  $R_T$  are set based the data capacity of interconnect 46 and  
15 the sample period  $T_{SampleLoad}$ , with the preferred sample period  $T_{SampleLoad}$  equal to two (2) seconds.

In a preferred embodiment of the invention the peak queue length threshold  $Q_T$  is set based on the number of T-1 or E-1 connection that make up interconnect 46. If interconnect 46 is comprised of a set of  $M_T$  T-1 lines, as  
20 follows:

$$Q_T = \min(3 * 168 * M_T * .9, \text{QUEUE\_CAPACITY}), \quad (1)$$

where the QUEUE\_CAPACITY is the depth of the FIFO queue within  
25 BCN poart 32f. If interconnect 46 is comprised of a set of  $M_E$  E-1 lines, the peak queue length threshold  $Q_T$  is set as follows:

$$30 \quad Q_T = \min(3 * 240 * M_E * .9, \text{QUEUE\_CAPACITY}). \quad (2)$$

The threshold on the peak transmission queue length is the number of bytes that can be queued while still allowing all queued data to be transmitted with a delay of 3 ms. Keeping the queue delay less than 3 ms keeps the delay introduced by transmission of traffic frames through BCN  
35 port 32f, interconnect 46 and BSC 24B sufficiently low that the quality of the communication remains acceptable to the end user. As is well known in the art, a delay of significantly more than 100 ms are noticeable to the user. Given the necessary delay for all the other processing that must be

performed, an additional delay for buffering of no more than 3 ms is preferred. Of course, the queue length must also be kept less than the queue in order to avoid losing data. In a preferred embodiment of the invention, the QUEUE\_CAPACITY of BCN port 32f is three kilo-bytes (3K).

5 The frame reception rate threshold  $R_T$  is set to as follows:

$$R_T = (50 * N * 0.9) / 1.05, \quad (3)$$

10 where N is the maximum number of network packets that can be transmitted by interconnect 46 per 20 millisecond (ms) time interval. N is described in greater detail below.

The reduction to 90% (.9) is to allow for errors and changes in the frame rate due to the 2 second sample period  $T_{\text{SampleLoad}}$ . The further reduction to 1/105% (1.05) is to account for signaling messages. By granting requests for inter-system soft hand-off as described above, the present invention allows inter-system soft handoff to be reliably conducted with a minimal amount of coordination between BSC's 24A and 24B, or with an MSC.

20 The maximum number of network packets that can be transmitted by interconnect 46 N depends on the capacity of interconnect 46 and nature of data being transmitted. In particular, the IS-95 standard provides two quality levels of telephone service are provided, with each level or service having an associated set of traffic rates, or "rate sets." The use of rate sets facilitates the generation of voice data at variable rates in response to the changes in voice activity that occur as a natural part of speech. The frame sizes of the high quality level of service, or "rate set two," service is provided in Table I, along with the probability of occurrence of each rate during a typical conversation.

Frame Type	Frame Length (Bits)	Probability
Full Rate	352	0.291
Half Rate	208	0.029
Fourth Rate	136	0.072
Eighth Rate	104	0.598

Table I. 14.4 Kbps Rate Set Frames

Table II lists N (the maximum number of network packets that can be transmitted by interconnect 46) when interconnect 46 is comprised of various numbers of T-1 and E-1 links.

5

T-1 Configuration ( $M_T$ )	Frames per 20 ms (N)	E-1 Configuration ( $M_E$ )	Frames per 20 ms (N)
Single T-1	84	Single E-1	130
Two T-1	205	Two E-1	315
Three T-1	328	Three E-1	470
Four T-1	450	Four E-1	660
Five T-1	570	Five E-1	820
Six T-1	700		
Seven T-1	810		

Table II.

Referring once again to FIG. 2, if subscriber unit 20 moves completely into the coverage area of base station 22B, the RF interface with base station 22A is terminated and the call is continued completely through base station 22B. If subscriber unit 20 continues to move into the coverage area of base station 22C, a "remote" intra-system soft handoff is initiated between base stations 22B and 22C. As noted above, an intra-system soft handoff is conducted between two base stations 22 coupled to the same BSC 24B, or within the same cellular system, and an inter-system soft handoff is between two base stations 22 that are coupled to different BSC's 24 and therefore part of different cellular systems. A remote intra-system soft handoff is one conducted between two base stations 22 that are part of the same cellular telephone system, but where the frame selection and frame distribution are performed at a remote BSC 24A.

In a preferred embodiment of the invention the remote intra-system soft handoff is performed in similar fashion to that performed during initiation of the inter-system soft handoff. In particular, after receiving a pilot strength measurement report (PSMR) from subscriber unit 20 indicating the pilot channel from base station 22C has been detected, selector subsystem 40 transmits an inter-system soft handoff request to admission

telephone system, but where the frame selection and frame distribution are performed at a remote BSC 24A.

In a preferred embodiment of the invention the remote intra-system soft handoff is performed in similar fashion to that performed during initiation of the inter-system soft handoff. In particular, after receiving a pilot strength measurement report (PSMR) from subscriber unit 20 indicating the pilot channel from base station 22C has been detected, selector subsystem 40 transmits an inter-system soft handoff request to admission control subsystem 44. Admission control subsystem 46 responds by performing the steps of FIG. 3 to either grant or deny the request.

Performing the remote intra-system soft handoff as described above also increases the likelihood of proper and reliable call processing because, in order to conduct the soft handoff, selector subsystem 40 must transmit frames to both base stations 22B and 22C via interconnect 46. Additionally, selector subsystem 40 must receive frame from both base stations 22B and 22C in order to perform frame selection. The transmission of these additional frames adds to the traffic transmitted across interconnect 46, and thus performing the remote intra-system soft handoff as described above facilitates ensuring adequate capacity exist to carry such additional traffic.

Thus, a method and apparatus for operating a cellular telephone system that allows inter-system soft handoff has been described. The exemplary embodiment provided above is to enable any person skilled in the art to make or use the present invention. Various modifications consistent with the use of the invention will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

**WE CLAIM:**

## CLAIMS

1. A method for conducting an inter-system soft handoff of a call  
made by a subscriber unit between a first cellular system and a second  
cellular system, the method comprising:  
a) monitoring a traffic level exchanged between the first cellular  
system and the second cellular system; and  
b) granting a soft handoff request based on said traffic level.

2. The method as set forth in claim 1 wherein step a)  
comprises monitoring an average frame rate over said interface.

3. The method as set forth in claim 1 wherein step a) comprises  
monitoring a peak queue length at an interface between the first cellular  
system and the second cellular system.

4. The method as set forth in claim 3 further comprising  
periodically transmitting said peak queue length and said average frame  
rate.

5. The method as set forth in claim 4 wherein said peak queue  
length and said average frame rate are transmitted once every 2 seconds.

6. The method as set forth in claim 3, 4 or 5 wherein step b)  
comprises:

- b.1) comparing said peak queue length with a queue length  
threshold; and  
b.2) granting said soft handoff request when said peak queue  
length is less than said queue length threshold.

7. The method as set forth in claim 3, 4 or 5 wherein step b)  
comprises:

- b.1) comparing said peak queue length with a queue length  
threshold;

6 b.2) comparing said average frame rate with an average  
frame rate threshold; and

8 b.3) granting said soft handoff request when said peak queue  
length is less than said queue length threshold and said average frame  
rate is less than said average frame threshold.

2 8. The method as set forth in any of claims 3 to 7 wherein,  
said first cellular system and said second cellular system are  
connected by an interconnect having an interconnect capacity, and  
4 said peak queue length is set to  $3 * 168 * M_T * .9$  when said  
interconnect comprises  $M_T$  T-1 connections, and to  $3 * 240 * M_E * .9$  when  
6 said interconnect comprises of  $M_E$  E-1 queue connections.

2 9. The method as set forth in claim 6 or 7 wherein,  
said first cellular system and said second cellular system are connected  
by an interconnect having an interconnect capacity, and  
4 said average frame rate threshold is  $(50 * N * 0.9) / 1.05$  where N is set  
based on how many T-1 or E-1 connection makeup said interconnect  
6 substantially as follows:

T-1 Configuration ( $M_T$ )	Frames per 20 ms (N)	E-1 Configuration ( $M_E$ )	Frames per 20 ms (N)
Single T-1	84	Single E-1	130
Two T-1	205	Two E-1	315
Three T-1	328	Three E-1	470
Four T-1	450	Four E-1	660
Five T-1	570	Five E-1	820
Six T-1	700		
Seven T-1	810		

2 10. A cellular telephone system capable of conducting an inter-  
system soft handoff with a second cellular telephone system, the cellular  
telephone system comprising:

4 a cellular system interface port for monitoring a traffic level  
exchanged with the second cellular telephone system;



6 a selector for initiating an inter system soft handoff; and  
an admission control subsystem for admitting said inter-system soft  
8 handoff and rejecting said inter-system soft handoff based on said traffic  
level.

11. The cellular telephone system of claim 10 wherein said cellular  
2 system interface port is further for monitoring a peak queue length at an  
interface between the cellular system and a second cellular system, and  
4 monitoring an average frame rate transmitted over said cellular system  
interface port.

12. The cellular telephone system as set forth in claim 11 wherein  
2 said cellular system interface port is further for periodically transmitting said  
peak queue length and said average frame rate.

13. The cellular telephone system as set forth in claim 12 wherein  
2 said peak queue length and said average frame rate are transmitting once  
every 2 seconds.

14. The cellular telephone system as set forth in claim 11, 12 or 13  
2 wherein said admission control subsystem is further for comparing said  
peak queue length with a queue length threshold, and granting said inter-  
4 system soft handoff when said peak queue length is less than said queue  
length threshold.

15. The cellular telephone system as set forth in any of claims 11 to  
2 14 wherein said admission control subsystem is further for comparing said  
peak queue length with a queue length threshold, comparing said average  
4 frame rate with an average frame rate threshold, and granting said inter-  
system soft handoff when said peak queue length is less than said queue  
6 length threshold and said average frame rate is less than said average frame  
threshold.

16. The cellular telephone system as set forth in any of claims 11 to  
2 15 wherein,

said first cellular system and said second cellular system are  
 4 connected by an interconnect having an interconnect capacity, and  
 said peak queue length is set to  $3 * 168 * M_T * .9$  when said  
 6 interconnect is comprised of  $M_T$  T-1 connections, and to  $3 * 240 * M_E * .9$   
 when said interconnect is comprised of  $M_E$  E-1 queue connections.

17. The cellular telephone system as set forth in any of claims 11 to  
 2 16 wherein,

said first cellular system and said second cellular system are connected  
 4 by an interconnect having an interconnect capacity, and

said average frame threshold is  $(50 * N * 0.9) / 1.05$  where N is set  
 6 based on how many T-1 or E-1 connections makeup said interconnect  
 substantially as follows:

8

T-1 Configuration ( $M_T$ )	Frames per 20 ms (N)	E-1 Configuration ( $M_E$ )	Frames per 20 ms (N)
Single T-1	84	Single E-1	130
Two T-1	205	Two E-1	315
Three T-1	328	Three E-1	470
Four T-1	450	Four E-1	660
Five T-1	570	Five E-1	820
Six T-1	700		
Seven T-1	810		

18. A controller for controlling hand off between two cellular  
 2 telephone systems, the controller comprising means for monitoring data  
 flow between the two systems and determining therefrom whether or not to  
 4 allow hand off between the two systems.

1/3

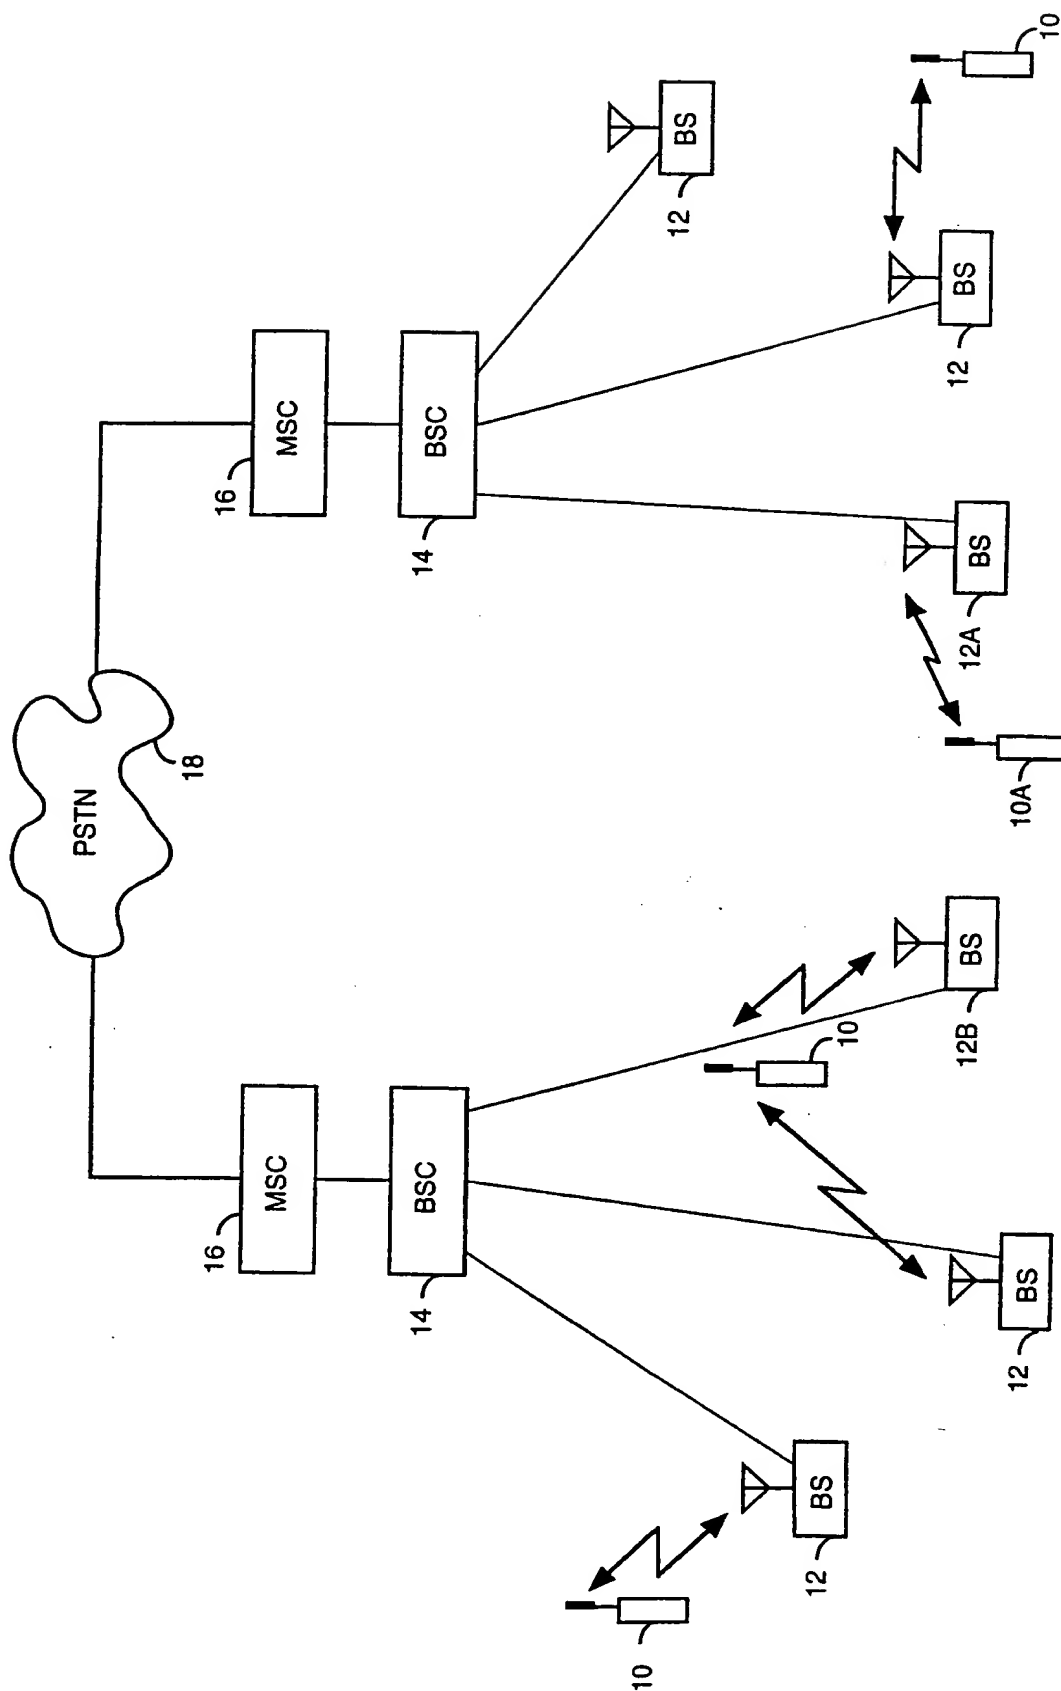


FIG. 1

2/3

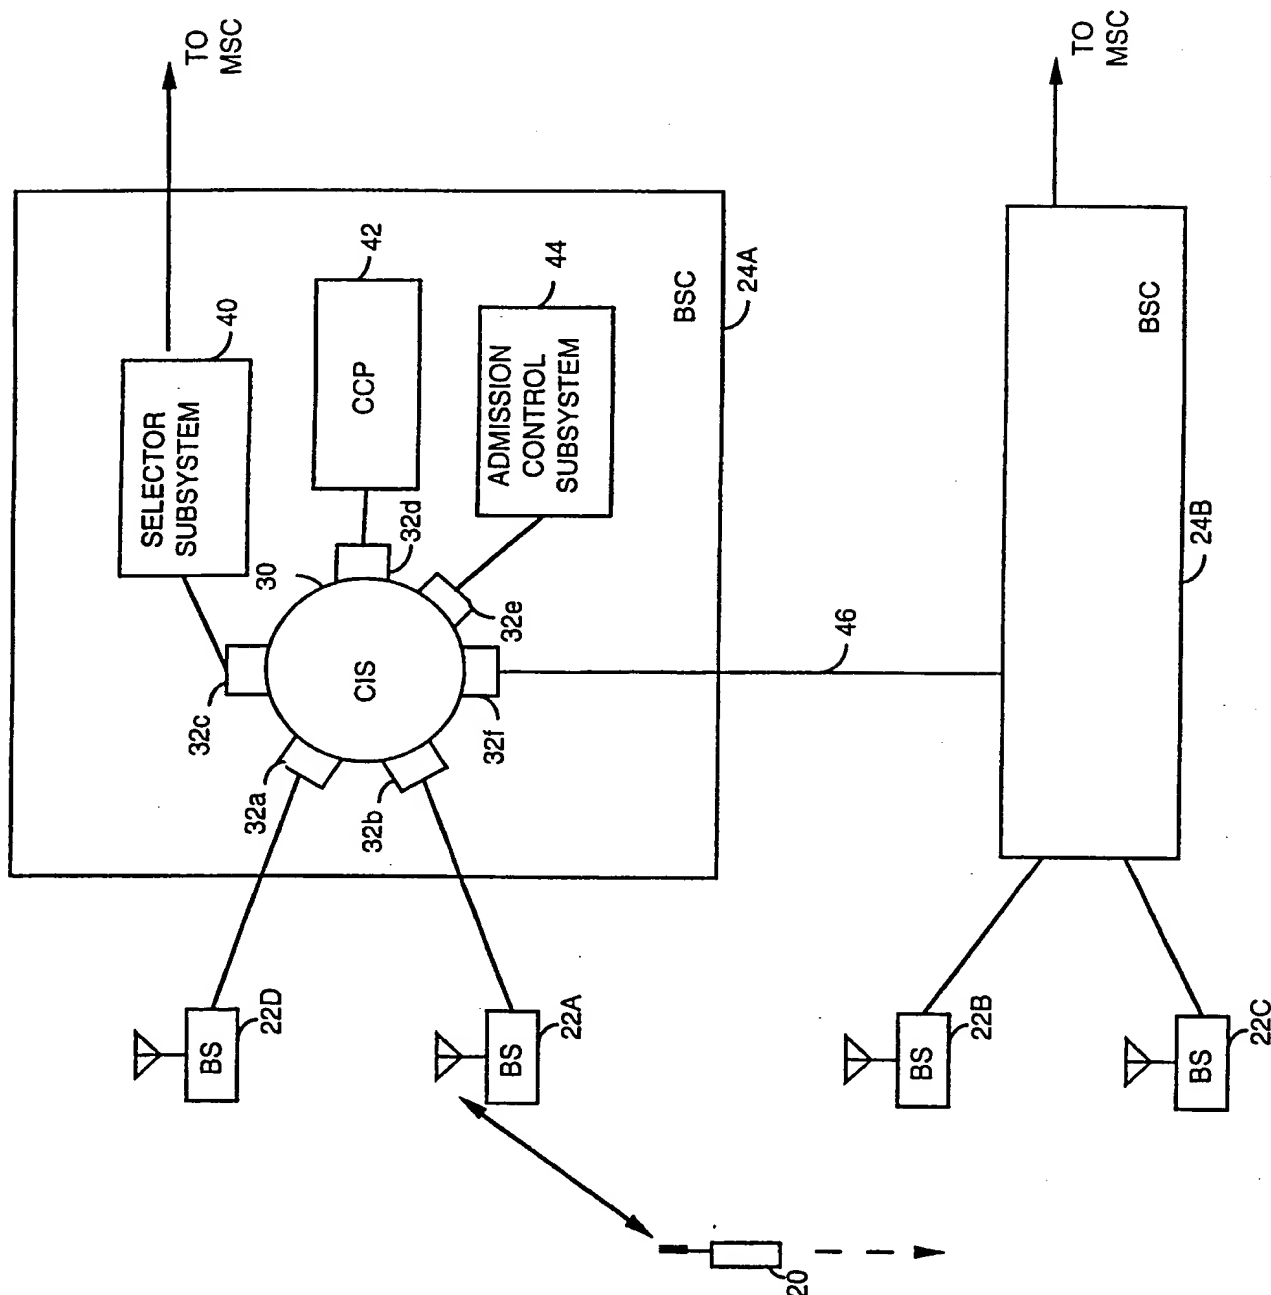


FIG. 2

3/3

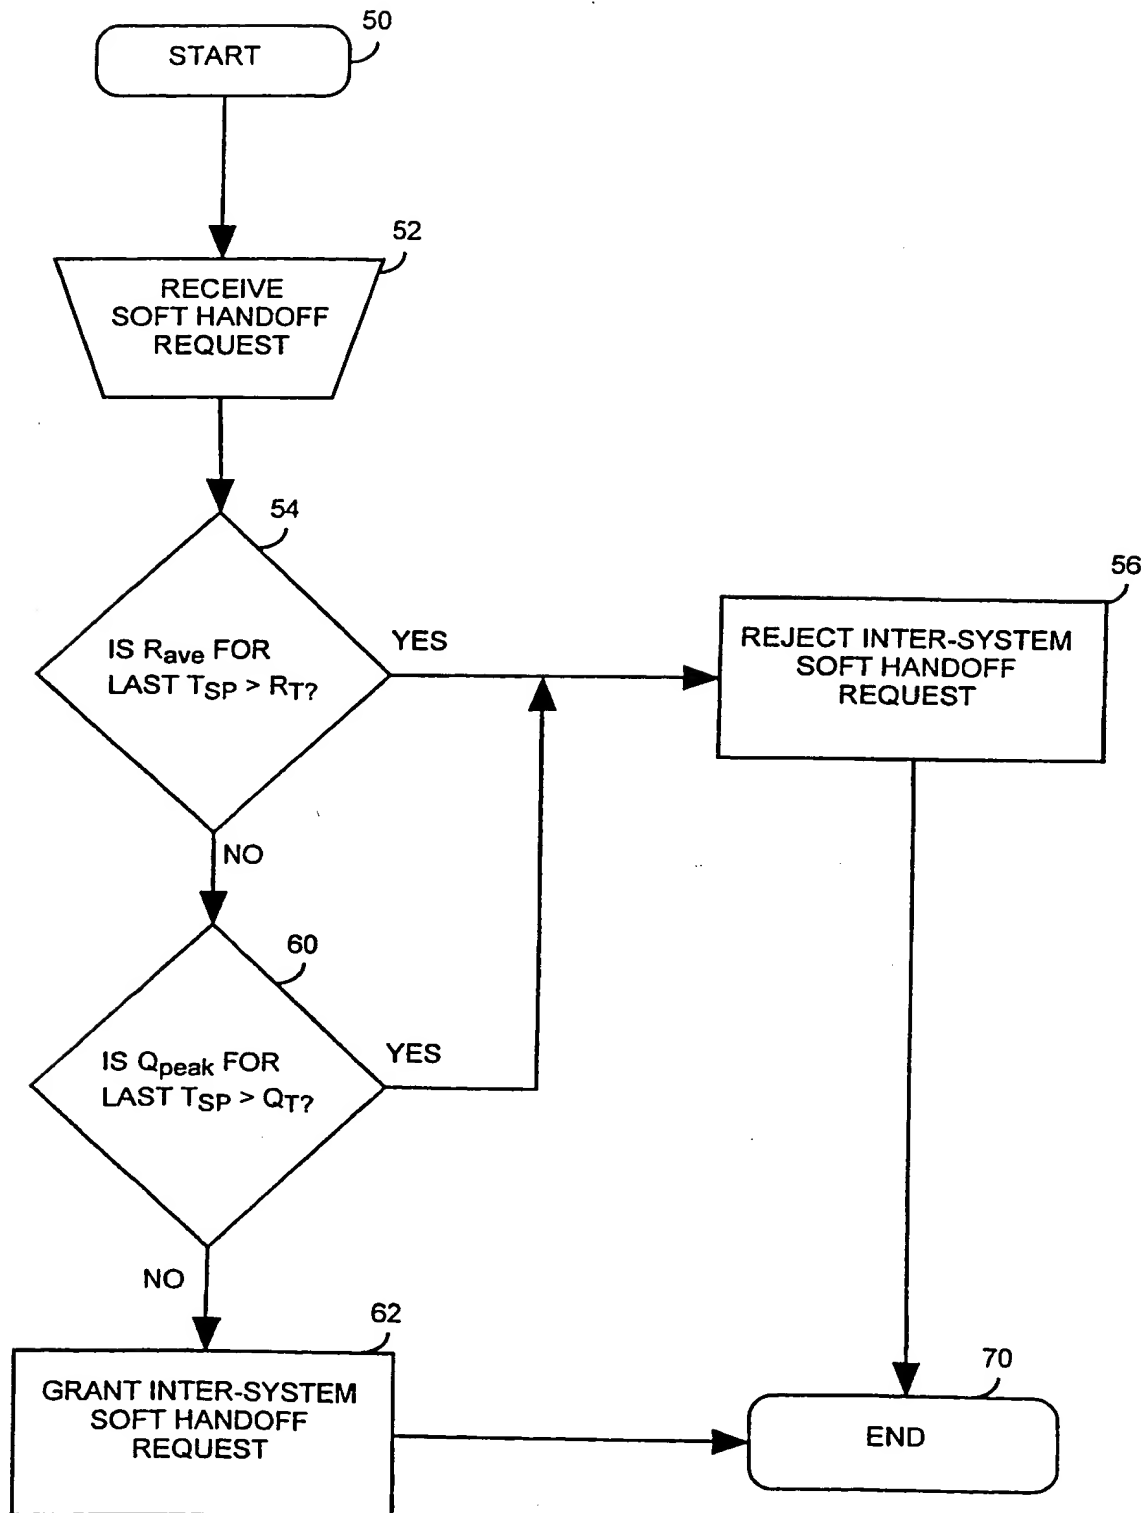


FIG. 3

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/08368

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 93 12588 A (TELEFONAKTIEBOLAGET LM ERICSSON) 24 June 1993 see claims 1-3	1, 3, 10, 18
P, X	WO 97 41698 A (QUALCOMM INC.) 6 November 1997 cited in the application see page 16, line 29 - page 17, line 2 see page 20, line 15 - line 28	1-4, 6, 7, 10, 18

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

2 October 1998

Date of mailing of the international search report

09/10/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Leouffre, M

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/08368

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9312588 A	24-06-1993	US 5301356 A	05-04-1994
		AT 154995 T	15-07-1997
		AU 3121393 A	19-07-1993
		BR 9205607 A	10-05-1994
		CA 2103809 A	11-06-1993
		DE 69220661 D	07-08-1997
		DE 69220661 T	16-10-1997
		DK 571596 T	02-02-1998
		EP 0571596 A	01-12-1993
		ES 2104958 T	16-10-1997
		FI 933458 A	03-08-1993
		JP 6507771 T	01-09-1994
		MX 9207019 A	01-06-1993
		SG 49351 A	18-05-1998
WO 9741698 A	06-11-1997	AU 2823597 A	19-11-1997